


# AURORA II

Glue down LVT

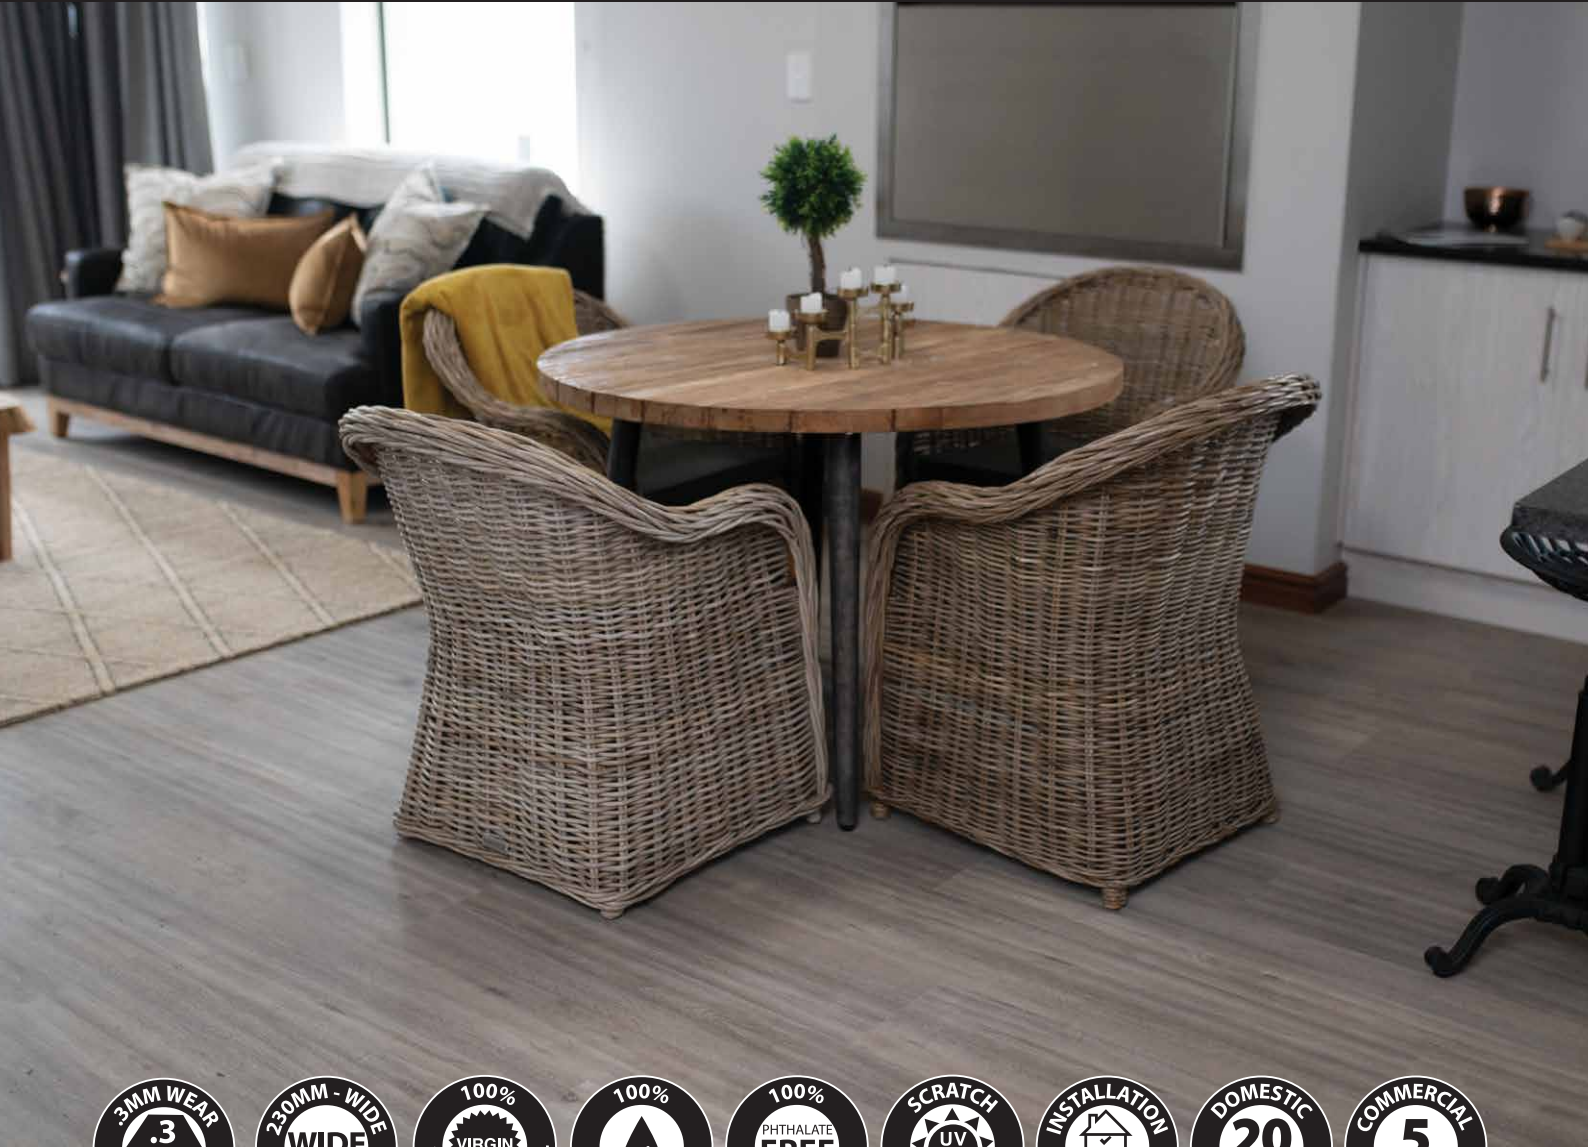


## Aurora II

Glue down luxury vinyl tile

Plank dimensions: 1220 X 228.6 X 2 mm (5.58sqm/box)

# AURORA II

## Glue down LVT

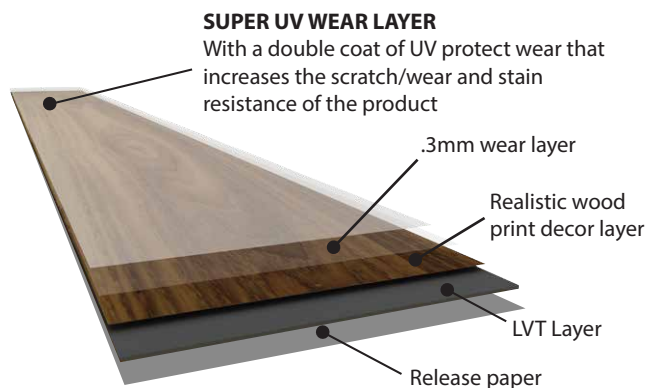

### SPECIFICATIONS

THICKNESS	2mm
Wear layer	.3mm wear layer
Plank dimensions	1220 X 228.6 X 2 mm
Packaging Unit	20 pieces per box / 5.58m <sup>2</sup>
Texture option/Surface finish	Antique wood texture and 4-sided micro bevel
Installation method	Glue down installation
Warranty	20 years heavy domestic and 5 years light commercial use
Application	Heavy domestic and light commercial
Waterproof	100% topically water-proof

### GLUE DOWN VINYL TECHNOLOGY

### TECHNICAL DATA

TEST	EN NORMS	RESULT
Dimensional squareness and straightness	EN427	Squareness: 0.15mm Straightness: 0.30mm
Dimensional stability	EN434	Pass
Impact resistance	EN13329	Pass
Abrasion group / wear resistance	EN660-1/2	Group T
Residual Indentation	EN433	Pass, 0.06mm
Colour fastness to artificial light	EN20105:B02	Pass > Grade 6
Slip resistance	EN12893	Class DS
Sound Reductions	ENISO717-2(ΔLw)	4dB
Fire classification	ENISO11925-2 EN13501-1 ENISO 9239-1	Bf1-S1
Electrical resistance	EN1081 Method C	Pass
Thermal resistance	EN12664	Pass
Toxic Element Test	EN71-3	Pass, Not Toxic and Does not contain heavy metals and formaldehyde
Recycled materials	No	

### GLUE DOWN VINYL TECHNOLOGY

### INSTALLATION

CAUTION	DO NOT EXPOSE TO DIRECT SUNLIGHT. COVER WINDOWS
INSTALLATION	ADHERE TO MANUFACTURERS INSTALLATION PARAMETERS AND READ THE INSTALLATION INSTRUCTIONS
CLEANING & MAINTENANCE	ONLY USE NON-ABRASIVE DETERGENTS AND A MICRO-FIBRE MOP AVOID EXCESS EXPOSURE TO WATER

### GLUE DOWN INSTALLATION AND MAINTENANCE GUIDELINE

### CERTIFICATES



**SAWLFA**  
SOUTHERN AFRICAN WOOD, LAMINATE  
& FLOORING ASSOCIATION  
MEMBER



#### EN ISO 10582 - Fit for use classification



Heavy Domestic  
(Class 23)



Light Commercial  
(Class 31)